

# GENUINE FRONT MUD FLAP

## INSTALLATION INSTRUCTIONS



VEHICLE : Mazda 3 (5HB/SDN)  
PART NUMBER : BP4K V3 450F


Thank you for purchasing a genuine MAZDA accessory.


Please read the contents of this booklet in order to properly install and use the Front mud flap. Your safety depends on it.

Keep these instructions with your vehicle records for future reference.

### **WARNING**

- There are several  **WARNING** and  **CAUTION** sections in this booklet concerning safety when installing or removing the rear mud flap. Always read and follow them in order to prevent injuries, accidents, and possible damage to the vehicle.

 **WARNING:** Indicates a situation in which serious injury or death could result if the warning is ignored.

 **CAUTION:** Indicates a situation in which bodily injury or damage to the vehicle could result if the caution is ignored.

- Do not modify the rear mud flap.
- Do not install the rear mud flap in any way other than described in the following instructions.
- If in any doubt, please ask your MAZDA dealer to install the accessory in order to prevent errors in installation.
- If you have any questions about the use of the accessory, ask your MAZDA dealer for proper advice before using it.
- MAZDA and its suppliers are not responsible for injuries, accidents, and damage to persons and property that arise from the failure of the dealer or installer to follow these instructions.
- To ensure safety and reliability of the work, installation, removal and disposal work must be carried out by an Authorized MAZDA Dealer shop.

### NOTE

#### To the dealer

Please turn over these instructions to the customer after installation.



#### To the customer

- Keep these instructions after installation. The instructions may be necessary for installing other optional parts or removal of this accessory.
- Should the vehicle or this accessory be resold, always leave these instructions with it for the next owner.


# 1 . PARTS

## NOTE

- Before installation, verify that the kit includes all the following parts and that parts are not dirty, scratched, or damaged.

Part	Part No./name	Qty.	Part	Part name	Qty.
	BP4K 51 840 Front mud flap(RH)	1		Installation instructions	1
	BP4K 51 850 Front mud flap(LH)	1			

## INSTALLATION VIEW

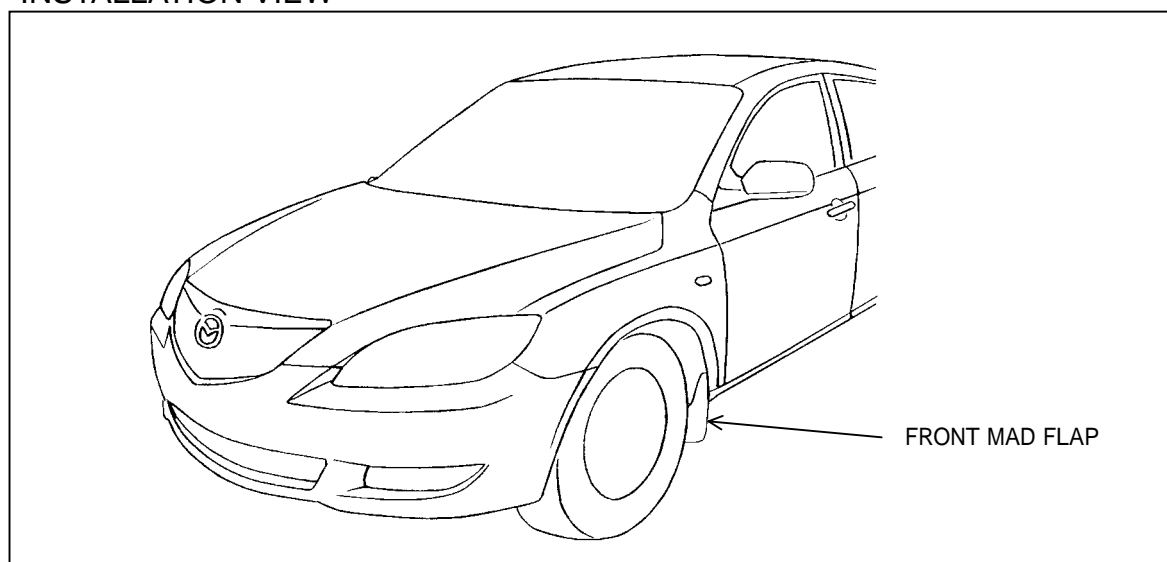

# 2 . REQUIRED TOOLS

Phillips screwdriver (stubby)

Flathead screwdriver

Cutter knife

# 3 . BEFORE INSTALLATION

## ⚠ WARNING

- Park the vehicle on a flat surface, block the tires and set the parking brake firmly before performing work. Be sure to turn the ignition switch off, otherwise the vehicle can move, causing personal injury or vehicle damage.

## ⚠ CAUTION

- Refer to the Workshop Manual for removal and installation of vehicle parts. Not following the procedures for removal/installation in the Workshop Manual could result in an accident or vehicle malfunction.


## 4 . PART REMOVAL

\* Preparation before installation.

- Turn the steering wheel to full left lock.

### Note

- When working on the right side, turn it to full right lock.

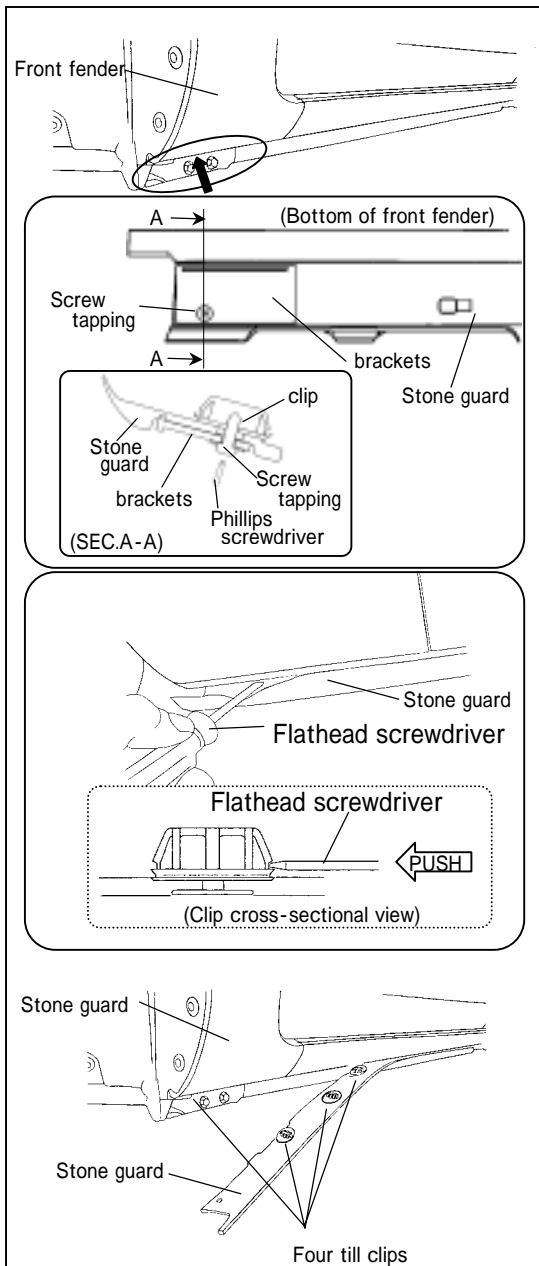


- 4-(1) Remove brackets from the stone guard.  
(Refer to the SEC.A-A)

- 4-(2) Cutting the stone guard

- Using a flathead screwdriver (see the cross-sectional view), remove the stone guard clips(4) starting from the front of vehicle.

### ⚠ CAUTION


- When you remove clips, remove them carefully and make sure that they are not damaged or lost.

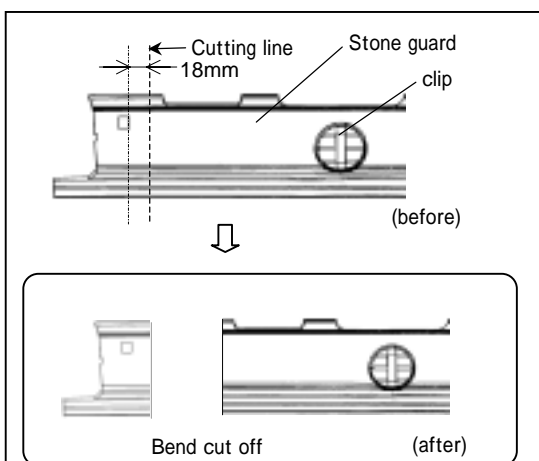

- 4-(3) Using a cutter knife or similar cutter, cut the stone guard at the position shown in the figure.


### Note

- The cut off portion of the stone guard is not necessary for this product.

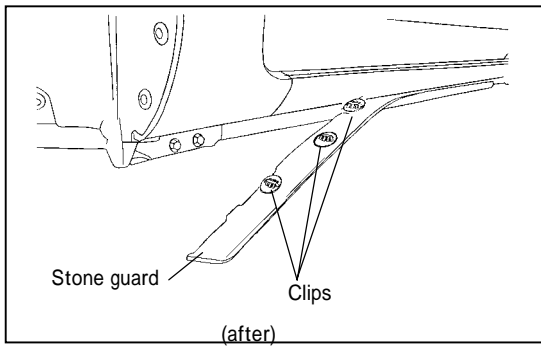

4-(4) Fit the clips (3) to the vehicle to place the stone guard (rear part) back into position.


## 5 . INSTALLATION OF FRONT MUD FLAP

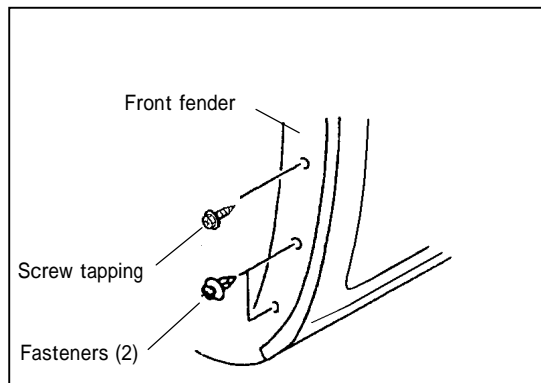

5-(1) Unscrew the screw tapping and fasteners.

### ⚠ CAUTION

- Keep the screw tapping and fasteners you just removed. They will be used later. Make certain that they are not scratched or lost.

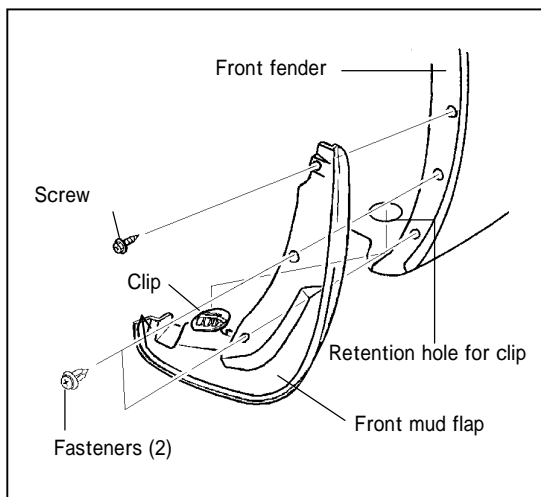

5-(2) Place the clip (bottom part of the flap) in the hole on the stone guard you removed at 4-(1) (refer to the picture on the left). You will hear a clicking sound when it is installed correctly.

5-(3) Install the two previously used fasteners. Tighten the previously used screw tapping with the phillips screwdriver.

### ⚠ CAUTION

- Make sure there are no excessive gaps.
- Make sure the screw tapping and fasteners are securely tightened.

[For Authorized Dealer]

## INSTALLATION INSPECTION SHEET

Mazda 3	Front Mud Flap
	B P 4 K V 3 4 5 0 F

### Inspection items after installation

Inspect the installed/reinstalled parts for the following items.

Inspection Parts	Inspection items ( )		
	Clearance/Fit	Scratches/Dirt	Installation/Tightening
Front Mud Flap			

Date , ,					
VIN.					
Approved		Checked		Person in charge	

The term of validity for this sheet: 3 months.