

< Previous Next >


2009 - Mazda6 - Body and Accessories

GLOVE COMPARTMENT REMOVAL/INSTALLATION


CAUTION:

- If the glove compartment is closed without being joined to the stay damper, the stay damper may be damaged. Verify that the stay damper is joined to the glove compartment before closing the glove compartment.


1. Pull the stay damper in the direction of the arrow shown in the figure, and detach the connecting part between the glove compartment and the stay damper.

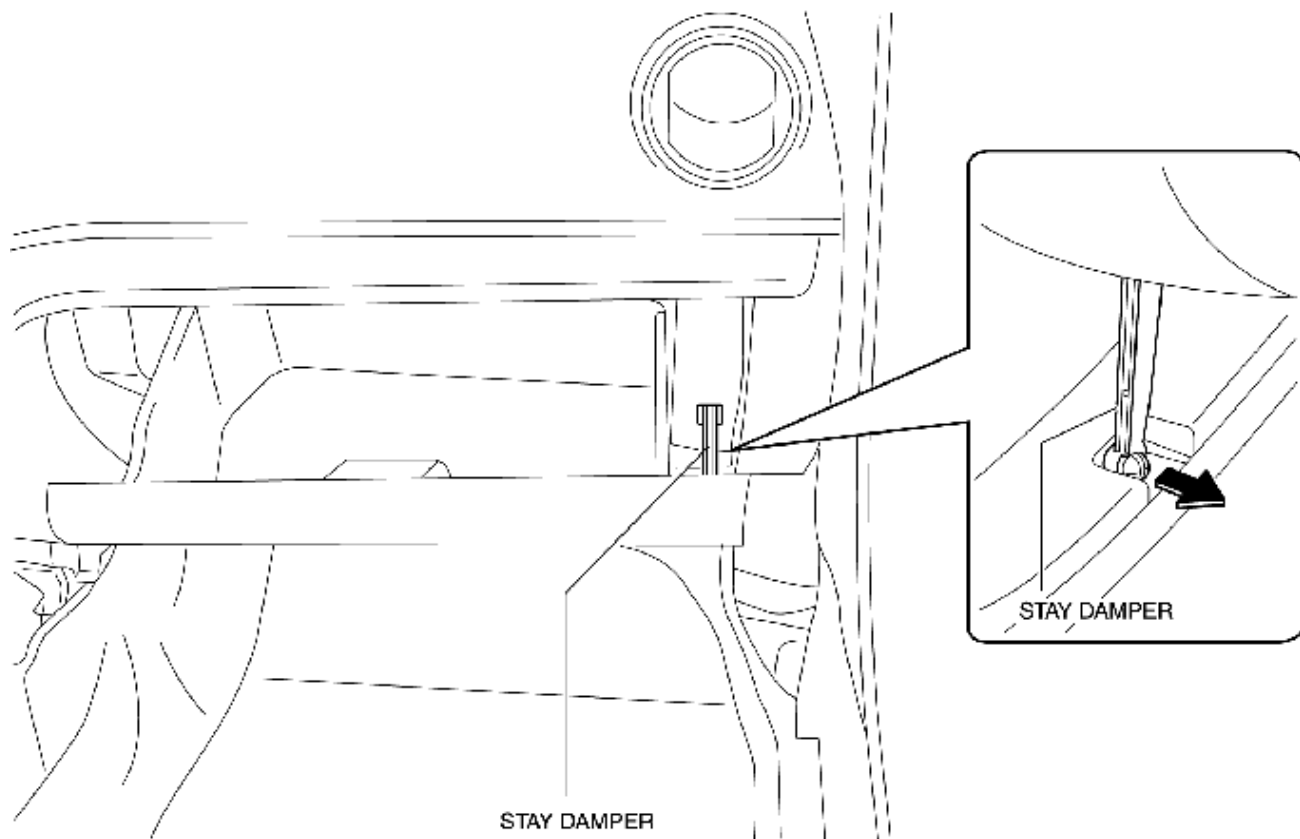

2. Push both ends of the inner-side glove compartment in the direction of the arrow shown in the figure.

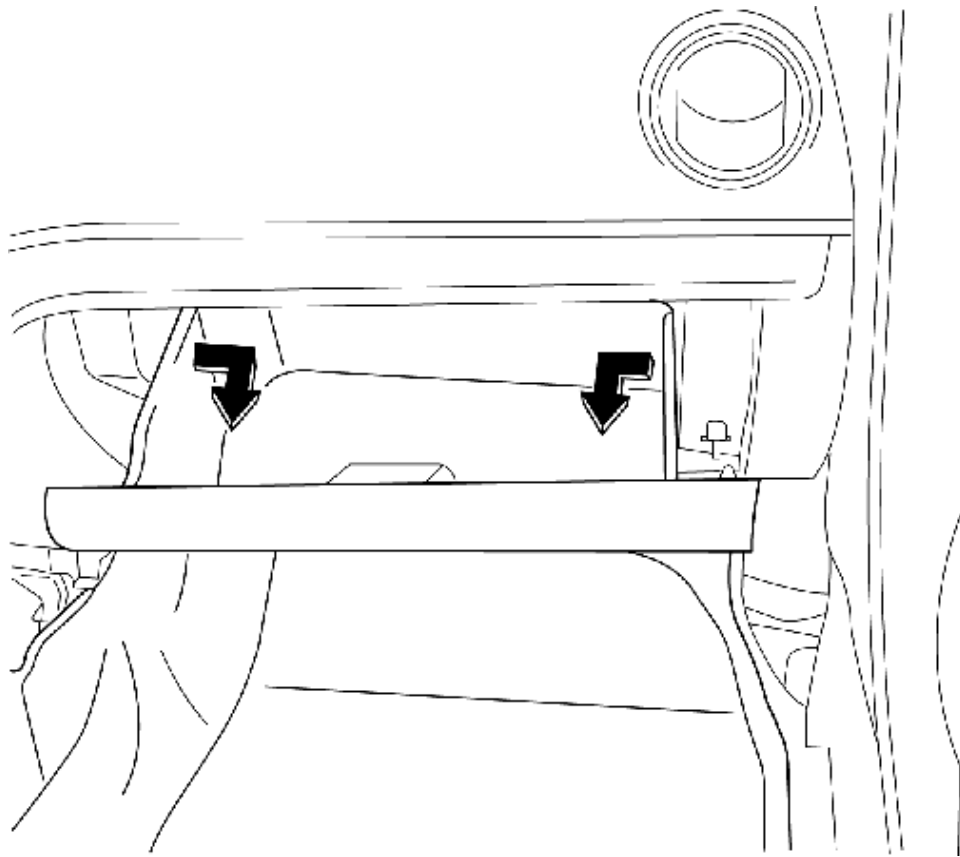

3. Lower the glove compartment.

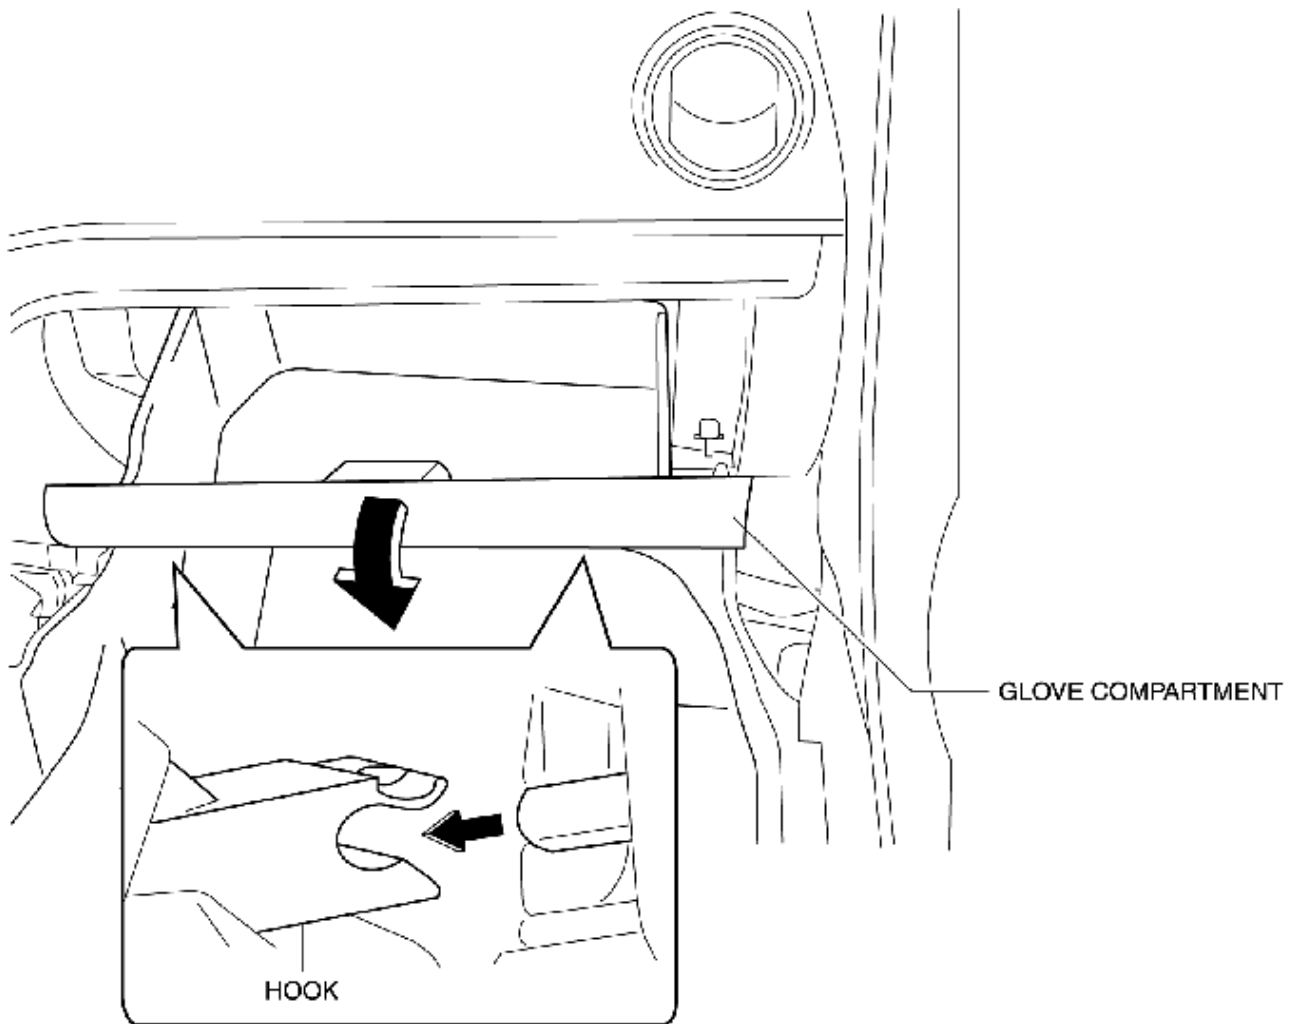

4. Detach the hook from the dashboard and remove the glove compartment.
5. Install in the reverse order of removal.

[< Previous](#) [Next >](#)

[Back to Top](#)

© 2009 Mazda North American Operations, U.S.A.